

Simple to use

Convenient Network Recorder

The ideal network video recording solution for your business safety

FXR-2000NV

4 Channel Network Video Recorder

- Real-time Mega-pixel recording
- Multi-codec support (H.264, MPEG-4, MJPEG)
- E-map & Google map support
- Multi-channel playback
- 3G Mobile phone viewer (iPhone, Blackberry, Windows Mobile)






4 Channel Network Video Recorder

FXR-2000NV



Specification

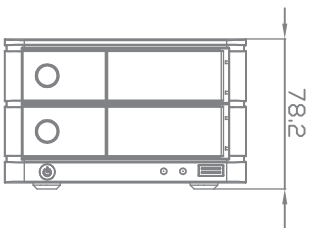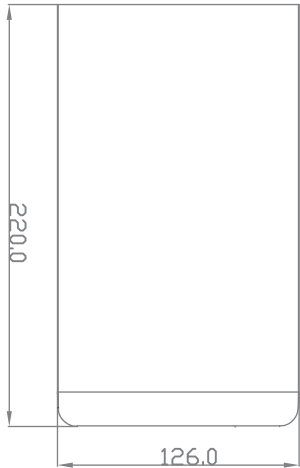

Model No.		FXR-2000NV
Camera Input		Max. 4pcs IP camera
Support Cameras		Fulix, Abus, ACTi, Arecont Vision, AVTECH, AXIS, A-MTK, A-Linking, Brickcom, Canon, D-Link, Etrivision, Hunt, IQInvision, Level 1, Mobotix, Panasonic, Pixord, Planet, Sony, Toshiba, Vivotek, Zavio
Recording	Recording frame rate	up to 120fps @ 1.3M (18Mbps)
	Compression	H.264, MPEG-4, MJPEG
	Resolution	Mega-pixel, HD, D1, CIF, QCIF
	Recording mode	Manual, Schedule, Continuous, Event
	Pre/Post alarm Rec.	Support
Audio		up to 4 channels
Live view	Screen mode	1/4 split screen, Full screen mode
	Snapshot	Support (JPEG)
	Digital PTZ	Support
	E-map	Support (Local e-map, Google map)
	Event popup	Support (Motion detected event pop-up display on E-map)
Playback	Multi-channel playback	Support (1/4 split screen, Full screen mode)
	Playback speed	Frame by frame, FF and REW (x-32~x32)
	Search method	Time search, Event search
	AVI export	Support
Networking	Network port	RJ-45, Gigabit Ethernet
	Network connection	Static IP, DHCP
	Emergency notification	HTTP / FTP / E-mail
	NTP	Support
	DHCP server	Support
	Two-way audio	Support
	CMS	-
	IE Viewer	Support (Max.4 users can access concurrently)
3GPP	Support (PDA(Windows Mobile 6.5), i-Phone, Blackberry, Symbian S60)	
Setup	Easy Setup	UPnP, Camera auto-searching function
	Data auto deletion	Support
	DST	Support
	User management	Multi user / group support
	Languages	15 languages
I/O	RS-232C	-
	RS-485	-
	UPS connection	-
	USB interface	2 ports (USB 2.0)
DI/DO		-
Storage	HDD	Max. 2 internal HDDs (up to 3TB)
H/W specification	Dimension	126(W)*220(D)*78.2(H)
	Weight	3.0kg
	Temperature	Operating : 5°C ~ 40°C Storage : -20°C ~ 70°C
	Humidity	Operating : 10% ~ 80% Storage : 5% ~ 90%
	Power supply	12V DC, 4A
	Power consumption	50W
Certification		CE, FCC